



Alliance 
QUALITY IS OUR STRENGTH
AllianceGator.com/europe

ADVANTAGE

2 0 2 4



EUROSTONE BOND

For natural stone paver joints up to 3.8 cm

IDEAL FOR

- Pedestrian, residential and commercial use
- Drainage applications
- Plaza, streets, parking lots, driveway, paths, pool surroundings, sloping areas and many more scenarios

FEATURES

- Rain safe 1 hour after water activation
- Sets above 0°C
- Very durable and waterproof
- For traffic applications, elements must be completely interlocked

SLATE GREY

GATOR XP G2 POLYMERIC SAND



GATOR XP G2

For joints up to 10 cm wide on a drainage base

IDEAL FOR

- Residential and commercial use
- Drainage applications
- Concrete pavers, natural stone, wet cast products, clay pavers and porcelain tile over 3 cm thick
- Streetscape, commercial and residential work, steep slopes, pool areas, patios, walkways, driveways and parking spaces

FEATURES

- No dust, haze free, no blower, one watering
- **Rain safe 15 minutes after water activation**
- Works above **0°C**
- Faster installation in 4 easy steps
- Suitable for false paver joints
- Waterproof bag
- 15 Year Limited Warranty

SLATE GREY

BEIGE

IVORY

BLACK

GATOR NITRO JOINT SAND



4 BEAUTIFUL COLORS

BLACK

SILVER

GREY

BEIGE

GATOR NITRO JOINT SAND

3 CM PORCELAIN TILE • CONCRETE PAVERS • NATURAL STONE & WETCAST STONE



PERMEABLE JOINT SAND

GATOR NITRO JOINT SAND is the ideal air cure, permeable jointing material. It is a ready-to-use mixture of calibrated sand and proprietary resin formula which cures when exposed to air, hardening from top to bottom of the joint. The product can be installed in wet or dry weather above 3°C.

IDEAL FOR

- Residential and commercial pedestrian applications with
 - Residential driveways with interlocking concrete pavers
 - Porcelain Tile over 3 cm thick, Natural Stone, Wetcast Stone, Concrete Paver

FEATURES

- Permeable
- Apply rain or shine
- Strength from top to bottom
- 25% more strength
- 25% faster setting time
- Drainage, permeable or hybrid applications



	Minimal joint width	Maximum joint width	Minimal joint depth	Pedestrian	Vehicular
Porcelaine tile	3 mm	6 mm	30 mm	✓	X
Stone / Concrete Paver	5 mm	50 mm	25 mm	✓	X
Interlocking concrete paver	5 mm	50 mm	60 mm	✓	✓

5 YEAR LIMITED WARRANTY

GATOR XTREME EDGE

NEW



GATOR XTREME EDGE

**XTREME EDGE VS
CONCRETE MIX**

2X STRONGER

**2X FASTER
SETTING TIME**



THE ULTIMATE 3D FIBER-REINFORCED STRUCTURAL EDGE


GATOR XTREME EDGE is the ultimate 3D reinforced micro-fiber mesh and polymer modified structural edge, which creates a strong and economical edging solution for any hardscape project.

IDEAL FOR

- Traditional, open graded and permeable applications and overlay
- Pedestrian and vehicular use
- Concrete pavers, slabs, Natural and Wet cast stone applications

FEATURES

- High Performance polymers for added strength
- Reinforced with 3D micro-fiber mesh
- Formulated for better workability
- Continuous lateral support matrix
- Freeze and thaw resistant

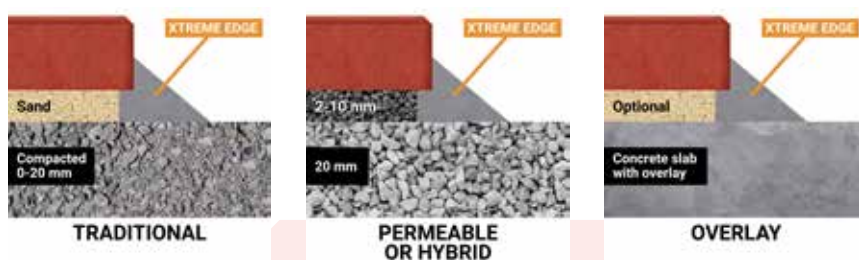



Mixed **GATOR ROCK BOND** kit is ready to use with 100% washed and dried riverstone, creating a durable permeable and decorative surface. Great for garden pathways where erosion and drainage is a concern.

IDEAL FOR

- Banding
- Edging and trimming
- Pathways
- Walkways
- Tree wells

FEATURES

- Porous and permeable
- Keeps stones in place
- Reduce maintenance and clean-up
- Durable in extreme conditions



ROCK AND BINDER KIT
18,2 kg of riverstone and 473 ml of liquid binding agent. 1 kit, at 13 mm surface thickness covers approximately 0.75 to 0.9 m².

1 CONTAINER OF 3,78 L
of the liquid binding agent mixed with 145 kg of dry clean stone, covers 7.4 m² at 13 mm thickness.



XTRA

**FAST CURE TIME
BOND STRENGTH
DURABILITY**

GATOR BLOCK BOND XP

XTRA PERFORMANCE POLYURETHANE ADHESIVE

IDEAL FOR

- Overlays and pool copings
- Steps and wall caps
- Fire pits (up to 204°C)
- Retaining walls
- Masonry
- Natural stones & wet cast products
- Concrete pavers and bricks
- Dry and damp surfaces

FEATURES

- Set time: maximum 1 hour
- Permanent bond within 24 hours
- VOC compliant
- Low odor
- High performance
- Does not shrink - does not crack or lose bond
- Fast setting
- Works above 0°C
- Extra durability against torque and tension
- Waterproof




296 ml



GATOR GRID, GATOR FABRIC & GATOR EDGE



30
KN/M



GG 30-30 BIAXIAL


FOR USE WITH STAIRCASES AND RETAINING WALLS.

NEW

GATOR GRID GG 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of your staircases, patios, landing areas and retaining walls. As a biaxial geogrid, GATOR GRID GG 30-30 has a high molecular weight as well as high-tenacity polyester yarns which are woven in tension and finished with a PVC coating.



N 535



NEW

GF4.4 NON-WOVEN HYDROPHILIC

IMPROVED WATER PERMEABILITY.

USE FOR PATIOS, DRIVEWAYS AND RETAINING WALLS.

GATOR FABRIC GF 4.4 (N 535) is a needle punched non-woven geotextile made of polypropylene fibers. GATOR FABRIC GF 4.4 (N 535) geotextile is ideal for drainage, filtration and will allow water flow of 5307 l./min/sq.m.) liters per minutes per square meter in a paver or retaining wall applications. Its filament fibers are used for soil separation and drainage. They combine high durability along with excellent physical and hydraulic properties. It is non-biodegradable and resistant to most soil chemicals.



GATOR EDGE RIGID AND FLEX

FEATURES

- Easy to use and quick to install
- Great lateral support
- Makes defining alleys, driveways or sidewalks easier
- Made with 100% polypropylene copolymer for strength and flexibility
- Gator Edge Rigid and Flex can be interconnected with the "Twist & Lock" system
- Gator Edge Rigid and Flex can be fastened with nails
- Gator Edge Rigid and Flex products are 2,44 m



Alliance
QUALITY IS OUR STRENGTH

AllianceGator.com/europe