



GATOR EDGE

RIGID AND FLEX

The unique "Twist & Lock" system, engineered with supported triangular angles at all key points, provide a strong lateral support, essential for the load transfer.

IDEAL FOR

 GATOR EDGE is an excellent choice to help define alleys, driveways or sidewalks. GATOR EDGE is designed for straight or curved installation. It is especially easy to use and quick to install.

FEATURES


- Easy to use and quick to install
- Great lateral support
- Makes defining alleys, driveways or sidewalks easier
- Made with 100% polypropylene or polyethylene for strength and flexibility
- Gator Edge Rigid and Flex can be interconnected with the "Twist & Lock" system
- Gator Edge Rigid & Flex are fastened with nails
- All Gator Edge products are 2,44 m



« TWIST & LOCK » SYSTEM

GATOR EDGE INSTALLATION INSTRUCTIONS

RIGID CAN TURN FLEXIBLE IN 3 EASY STEPS

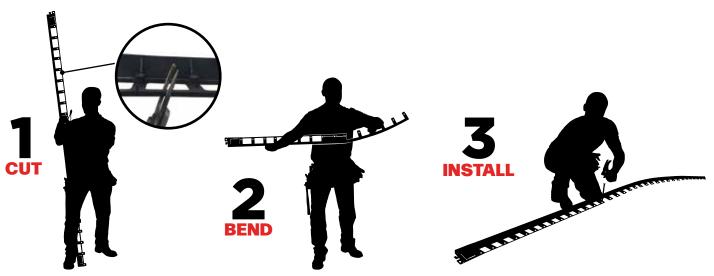

STEP 1

■ It can be installed either before or after the paver installation.

STEP 2

■ Use one 25 cm nail every second hole and at every "Twist & Lock" junction, this will ensure continuous lateral support. Ensure edges are installed firmly against the pavers on a minimal compacted structural aggregate base of 15 cm deeper and wider on all sides than the paved area.

PRODUCT	PACKAGING	UNITS PER PALLET
GATOR EDGE FLEX	1 piece = 2,44 lin. m 1 mini-pack = 6 pieces = 14,64 lin. m 1 pack = 24 pieces = 58,5 lin. m	1 pallet = 28 packs = 1639 lin. m
GATOR EDGE RIGID	1 piece = 2,44 lin. m 1 mini-pack = 6 pieces = 15,7 lin. m 1 pack = 24 pieces = 58,5 lin. m	1 pallet = 28 packs = 1639 lin. m



FOR MORE DETAILS, VISIT

AllianceGator.com/europe/