



## **GATOR FABRIC 4.4**

### **NON-WOVEN GEOTEXTILE (N 535)**

**For paver, retaining wall, drainage  
and filtration applications**

#### **USES**


- Drainage control
- Protection against erosion
- Behind retaining walls
- Paver sub base foundation
- General landscape
- Soil separation

#### **FEATURES**

- Specially treated to be hydrophilic, it allows high-water flow 5307 l/min/m<sup>2</sup>
- Drainage and filtration
- Soil separation
- Erosion control
- UV-Resistance
- Inert to soil chemicals (Alkalis, Acids)
- Inert to biological degradation
- Easy to handle
- High strength/dimensionally stable

# INSTALLATION INSTRUCTIONS: METHOD OF INSTALLATION OF GATOR FABRIC GF 4.4 NON-WOVEN (N 535) FOR DRAINAGE AND SOIL SEPARATION:

TYPICAL GRAVITY WALL SECTION AND PAVER

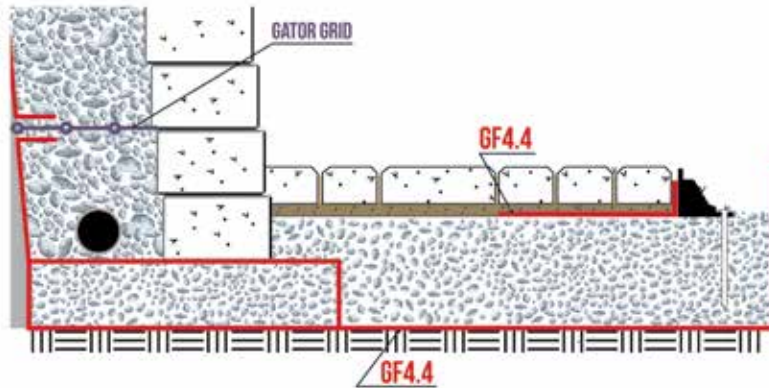

## PLEASE NOTE

- When excavation has been completed, leveled and compacted, lay the **GATOR FABRIC GF 4.4 NON-WOVEN** covering bottom and sides of the excavated area.
- Ensure the **GATOR FABRIC GF 4.4 NON-WOVEN** is stretched to avoid any folds.
- Always overlap the seams of geotextile by a minimum 30 cm.



- 1 Excavate the soil in the location of the project according to best practices.
- 2 With a rake, even out, level and compact the soil to a tolerance of 10 mm.
- 3 Apply **GATOR FABRIC GF 4.4 NON-WOVEN** to the entire foundation and sides. Overlap seams by 30 cm of the hardscape installation and trim to size.
- 4 Spread, level and compact your aggregate or bedding material or clean stone 2-10 mm then complete with your selected pavement.

Size of the roll	Kg / Roll	Packaging
1,84 m x 33 m	12 kg	30 rolls / skid
1,84 m x 91 m	22,9 kg	16 rolls / skid

FOR MORE DETAILS, VISIT

[AllianceGator.com/europe/](http://AllianceGator.com/europe/)