




GATOR EDGE RIGID & FLEX

TDS Revision Date (dd/mm/yyyy): 22/01/2024

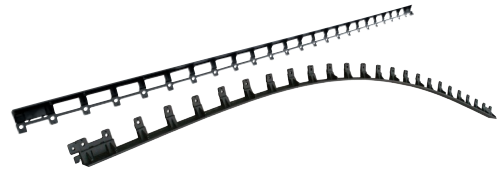

TECHNICAL DATA SHEET




Update: January 22, 2024
Make sure you have an updated data sheet on hand.

Description: **Gator Edge Rigid & Flex** are made with 100% Polypropylene Co-Polymer. This will give it great strength as well as provide great flexibility. We have a Rigid model which is ideal for straight applications and the Flex model that can be used for all curved applications such as walkways, paths, entrances etc. Both the **Rigid and Flex** can be locked together with the "Twist & Lock" system. Finally the Rigid could be transform in a partial Flex by cutting the bridge support between each triangular angles.

Features:

- The Flex can connect to the Rigid.
- Use a "Twist & Lock" connection system.
- Will not corrode.
- Easy-to-use.
- Available in flexible or rigid edges.
- Xtra versatile.
- Xtra robust system.
- Xtra support strength.
- UV resistant.
- Comes in 2.44 m lengths.
- Use with Gator Nails.

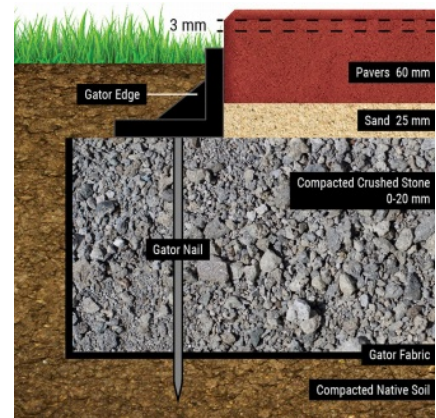

For use on: **GATOR EDGE** is an excellent choice to help define alleys, driveways or sidewalks. **GATOR EDGE** is designed for straight or curved installation. It is especially easy to use and quick to install.

INSTALLATION INSTRUCTIONS:

1. It can be installed either before or after the paver installation.
2. Use one 25 cm nail every second hole and at every Twist & Lock junction, this will ensure continuous lateral support. Make sure edges are installed on a compacted structural aggregate base.
3. Use the Twist & Lock feature to secure the edging lengths together.



Packaging: **Product**

Gator Edge Flex

1 piece = 2.44 m
1 Mini-pack = 6 pieces = 14.65 m
1 Master-pack = 4 Mini-packs = 58.5 m
1 pallet = 28 Master-packs = 1639 m


Gator Edge Rigid

1 piece = 2.44 m
1 Mini-pack = 6 pieces = 14.65 m
1 Master-pack = 4 Mini-packs = 58.5 m
1 pallet = 28 Master-packs = 1639 m




GATOR EDGE RIGID & FLEX


TDS Revision Date (dd/mm/yyyy): 22/01/2024

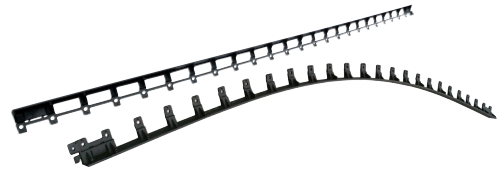


FLEX MODEL

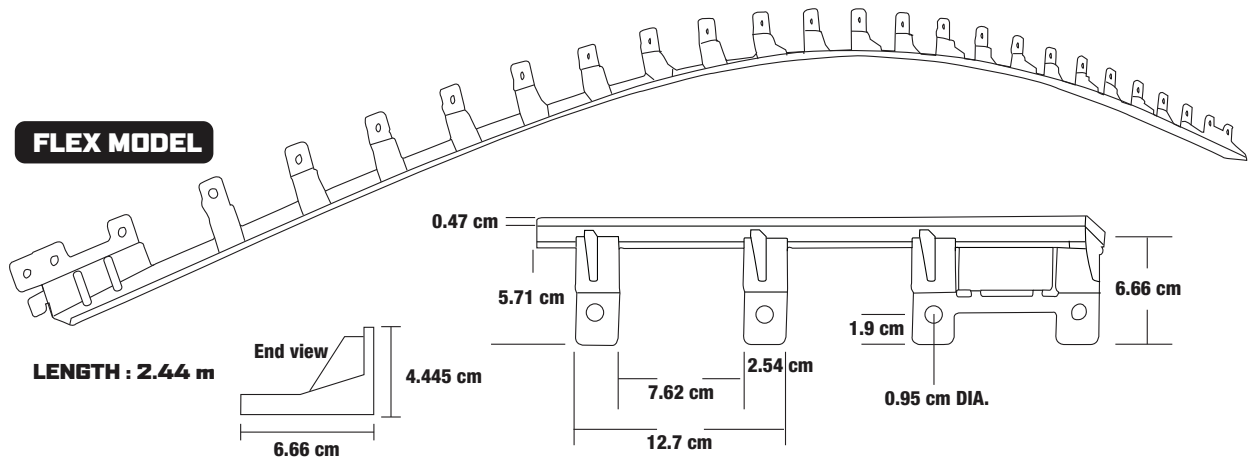


RIGID MODEL

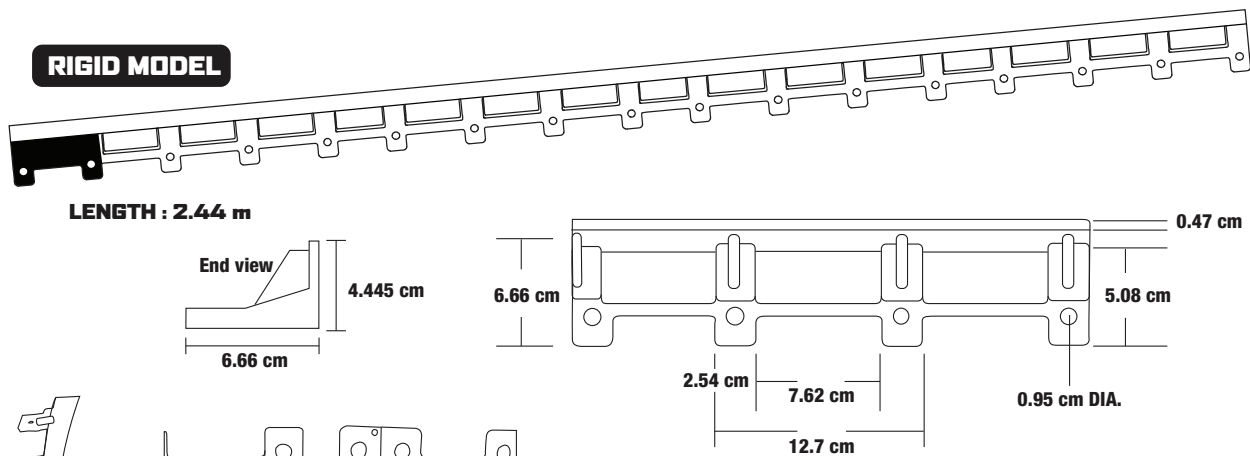

MALE-FEMALE

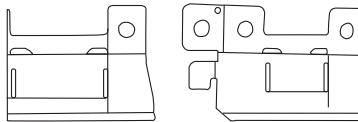


TWIST-N-LOCK



BEDDING SAND
maximum of 2.5 cm

POLYMERIC SAND

Gator Edge is:
• Height 4.45 cm
• Width 6.66 cm
• Length 2.44 m

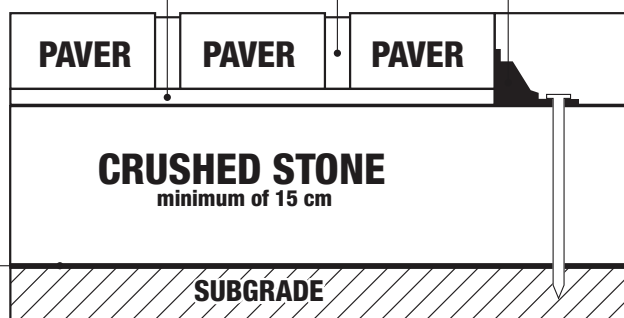

GATOR EDGE FLEX CAN CONNECT TO GATOR EDGE RIGID

