



**GATOR AQUA ROCK
FOR PERMEABLE PAVER JOINTS**
TDS Revision Date (dd/mm/yyyy): 31/03/2025



TECHNICAL DATA SHEET

Update: March 31, 2025
Make sure you have an updated data sheet on hand.
Canada and U.S. dial **1-855-847-7767** or (450) 624-1611

FOR PERMEABLE PAVER JOINTS GRADED [ASTM NO.9](#) GRANITE STONE

Description: **GATOR AQUA ROCK** is manufactured to meet ASTM No.9 requirements for permeable paver joint units. The calibrated gradation obtained from the fractured high-strength granite makes it the ideal product for the bedding course & jointing material to collect surface water run-off and help stabilize interlocking paver surfaces.

Ideal for:

- Residential and commercial traffic
- Permeable paver joints and bedding material for pavers
- Concrete paver and wet cast products
- Driveways, parking lots, patios & walkways and more
- Bedding and jointing material
- Foundation material under Gator Base

Features:

- Graded to meet [ASTM No.9](#)
- High strength granite STONE for long-term use.
- Helps prevent erosion.
- Reduction of storm water runoff.
- Calibrated for the majority of permeable pavers.

| ASTM No.9 | Sieve size | ASTM No.9 |
|-----------|------------------|-----------|
| | 9.5mm | 100 |
| | No.4 (4,75mm) | 85 to 100 |
| | No.8 (2,36mm) | 10 to 40 |
| | No. 16 (1,18mm) | 0 to 10 |
| | No. 50 (0.300mm) | 0 to 5 |

Coverage: 1 bag of **GATOR AQUA ROCK** will cover on average, for a 60 mm paver, 1.86 to 2.32 meters.
Super-Sack will cover on average, for a 60 mm paver, 81.78 to 102.2 sq. m.



Alliance Designer Products Inc.
1800 Berlier st., suite 200, Laval, Quebec, Canada H7L 4S4
Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
www.alliancegator.com - Email : info@alliancegator.com




GATOR AQUA ROCK FOR PERMEABLE PAVER JOINTS

TDS Revision Date (dd/mm/yyyy): 31/03/2025

Important Installation Notes

The minimum slope of the soil subgrade should be 0.5%. Actual slope of soil subgrade will depend on the drainage design and exfiltration type. All drainpipes, observation wells, overflow pipes, geotextile and impermeable liner (if applicable) should be in place per the drawings prior to or during placement of the subbase and base, depending on their location. Care must be taken not to damage drainpipes during compaction and paving. No mud or sediment can be left on the base or bedding aggregates. If they are contaminated, they must be removed and replaced with clean materials.

GATOR AQUA ROCK SUB-SURFACE PREPARATION:

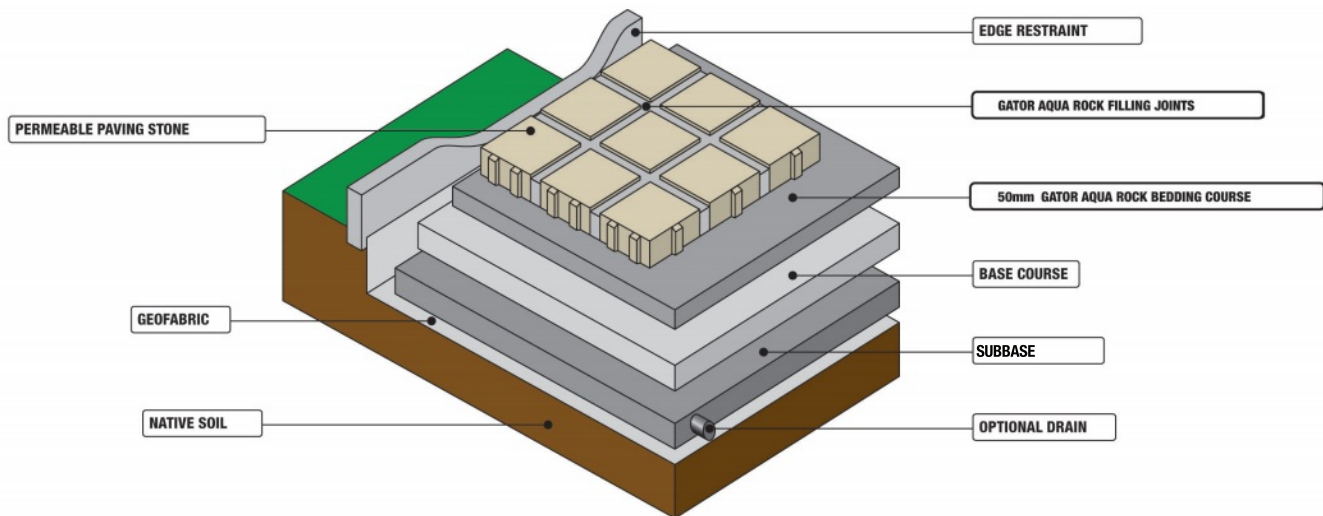

Bedding course:

1. Spread **GATOR AQUA ROCK** bedding material over base course. Bedding course should be 50 mm of **GATOR AQUA ROCK**.
2. The surface tolerance of the screeded **GATOR AQUA ROCK** bedding layer shall be ± 10 mm over a 3 m straight edge.
3. Do not subject screeded bedding material to any pedestrian or vehicular traffic before paving unit installation begins.



**GATOR AQUA ROCK
FOR PERMEABLE PAVER JOINTS**

TDS Revision Date (dd/mm/yyyy): 31/03/2025

JOINTING MATERIAL AND PERMEABLE PAVER UNITS:

1. Lay the pavers in the selected pattern. Cut pavers and place along the edges, no piece should be smaller than 1/3 of a whole unit. To increase strength pattern in vehicular applications, we recommend laying the pattern in a 45-degrees-to-traffic flow.
2. For applications such as driveways, we recommend that the edge restraints be installed with a ready-mix concrete and reinforced with reinforcing steel.
3. Sweep **GATOR AQUA ROCK** to fill joints.
4. Remove excess **GATOR AQUA ROCK** on the surface by sweeping pavers clean.
5. Compact and set the pavers into the bedding material using a low-amplitude, 75-90 Hz plate compactor capable of at least 4,000 lbs (18 kN) centrifugal compaction force. This will require at least two passes with the plate compactor.
6. After compaction insure that the joints will be filled up-to 3 mm from the top of the pavers and add or remove any excess of **GATOR AQUA ROCK** jointing material.

NOTE: The minimum slope of the finished pavement surface should be 1%. The surface of the pavers may be 3 to 6 mm above the final elevations after compaction. This helps compensate for possible minor settling normal to pavement.

| Packaging: | Product | Size | Units per Pallet |
|-------------------|---------------------------------------|--------------|-------------------------|
| | GATOR AQUA ROCK - Granite Grey | 22.7 kg | 56 |
| | -Plastic bags | | |
| | -Intact pallets can be stored outside | | |
| | GATOR AQUA ROCK Super-Sack | 1 metric ton | 1 |

LIMITED WARRANTY:

The manufacturer cannot guarantee results as it has no control over surface and sub-surface preparation and product application. If this product is proven to be defective, on the condition that it was installed pursuant to the method of application and surface and sub-surface preparation described above, the sole obligation of the manufacturer is to refund the purchase price. Proof of purchase is required for any claim. The manufacturer shall not be liable for any other damages whatsoever, direct or consequential. To the extent permitted by law, the manufacturer excludes any implied warranty of quality, merchantability or fitness for purpose. The manufacturer shall not be liable for any other damages or costs whatsoever, including removal or reinstallation of sand, paver, slab or natural stones.



Alliance Designer Products Inc.
1800 Berlier st., suite 200, Laval, Quebec, Canada H7L 4S4
Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
www.alliancegator.com - Email : info@alliancegator.com